


AAA Lab



NOTE: The CML topology does not contain TACACS+ servers. However, your tasks involve configuring router R1 as if those servers did exist at their specified IP addresses.

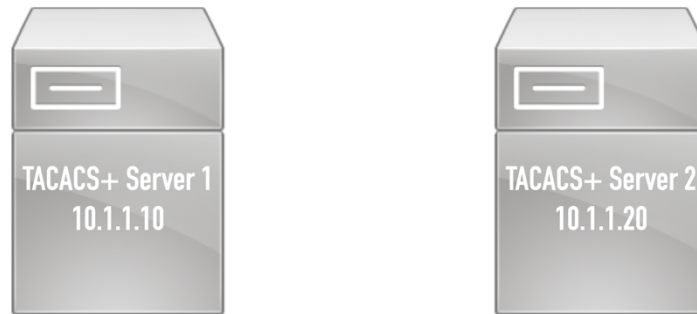

Lab Tasks:

- Enable AAA globally
- Create local user with name test, password **cisco**
- Configure both TACACS+ server instances, named **TACACS1** and **TACACS2**
- Secret key set to **security** for both servers
- Create TACACS+ server group named **T-GROUP** and add both servers
- Configure AAA authentication using default method list
 - TACACS+ server group should be primary method, followed by local login, and enable password
- Enable authorization requirement for EXEC shell
 - TACACS+ server group should be primary method, followed by local login
- Test by logging out/in to the console