

16 May 2017

# SECURITY APPLIANCES

## R80.10

Quick Start Guide

*Classification: [Protected]*



 Check Point  
SOFTWARE TECHNOLOGIES LTD.

# INFINITY

© 2017 Check Point Software Technologies Ltd.

All rights reserved. This product and related documentation are protected by copyright and distributed under licensing restricting their use, copying, distribution, and decompilation. No part of this product or related documentation may be reproduced in any form or by any means without prior written authorization of Check Point. While every precaution has been taken in the preparation of this book, Check Point assumes no responsibility for errors or omissions. This publication and features described herein are subject to change without notice.

RESTRICTED RIGHTS LEGEND:

Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 and FAR 52.227-19.

TRADEMARKS:

Refer to the Copyright page <http://www.checkpoint.com/copyright.html> for a list of our trademarks.

Refer to the Third Party copyright notices [http://www.checkpoint.com/3rd\\_party\\_copyright.html](http://www.checkpoint.com/3rd_party_copyright.html) for a list of relevant copyrights and third-party licenses.



**Warning** - Before you begin with the appliance installation, read all the safety instructions in your *Security Appliance Getting Started Guide* <http://supportcontent.checkpoint.com/solutions?id=sk96246>.



**Latest Software** - We recommend that you install the most recent software release to stay up-to-date with the latest functional improvements, stability fixes, security enhancements and protection against new and evolving attacks.

Thank you for choosing the Check Point Security Appliance, part of the Check Point Infinity consolidated architecture. You are now minutes away from setting up the most advanced security platform designed to prevent the most sophisticated threats today and in the future.

Should you have any questions about your purchase, please don't hesitate to contact Check Point support services.

# 1. Power Up Your Check Point Appliance

- Connect the power cable to the power port on the appliance rear panel and plug it into a power outlet. If you have two power supply units, connect both. The machine is powered on automatically after connecting the power cords.
- LCD will display the model number when OS is up. An LCD is included only in selected models




## 2. Connect Your PC For Initial Setup

- Initial setup must be done from a PC connected to the appliance's management interface via the included Ethernet cable. Management interface is marked as MGMT on the appliance front panel.



Windows 7, 8 & 10 configuration:

- Right-click on the **network** adapter you want to assign an IP address and click **Properties**. Select Internet Protocol Version 4 (TCP/IPv4) and click the **Properties** button.
- In the **IP address** field, enter **192.168.1.2**.
- In the **Subnet mask** field, enter **255.255.255.0**.
- Leave the **Default gateway** and **DNS settings** fields empty.
- Click **OK** and close the dialog boxes.

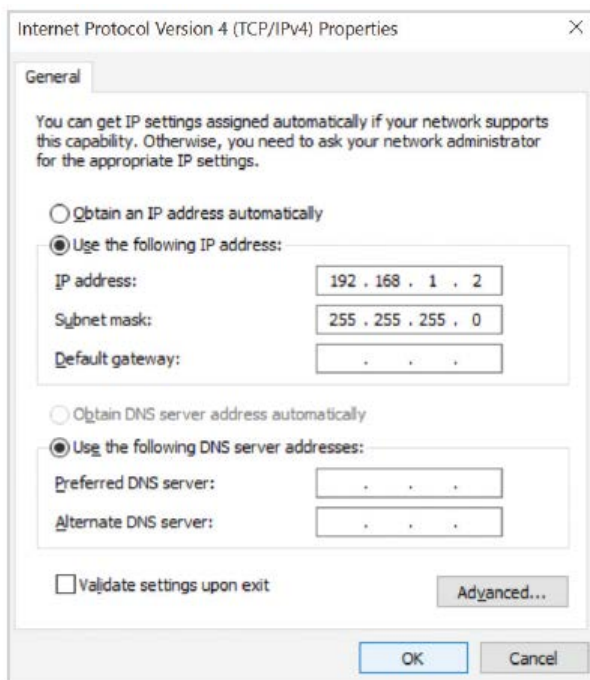


**Figure 1 - Internet Protocol (TCP/IP) Properties**

After completing the initial connection, the First Time Configuration Wizard will guide you through the process of configuring the appliance.

# 3. Configure Your Appliance


- Launch the Web browser and enter **https://192.168.1.1** in the address bar.  
**Note** – You might receive a certificate error page due to a known, unresolved browser conflict. Click **Continue to this Web site**.
- Log in with the default system administrator login name/password, **admin/admin**, and click **Login**.

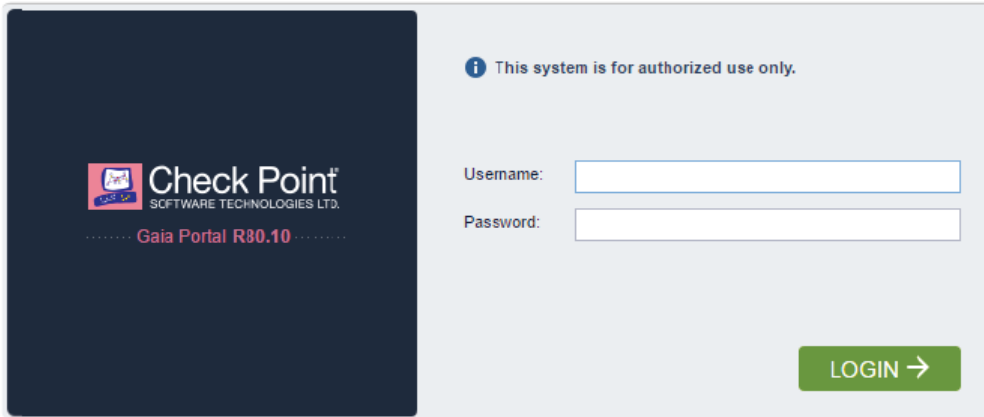

**Figure 2** - Appliances Login Page

**Note** – Popups must always be allowed on [https://<appliance\\_ip\\_address>](https://<appliance_ip_address>).

- The First Time Configuration Wizard will begin automatically (Fig. 3).

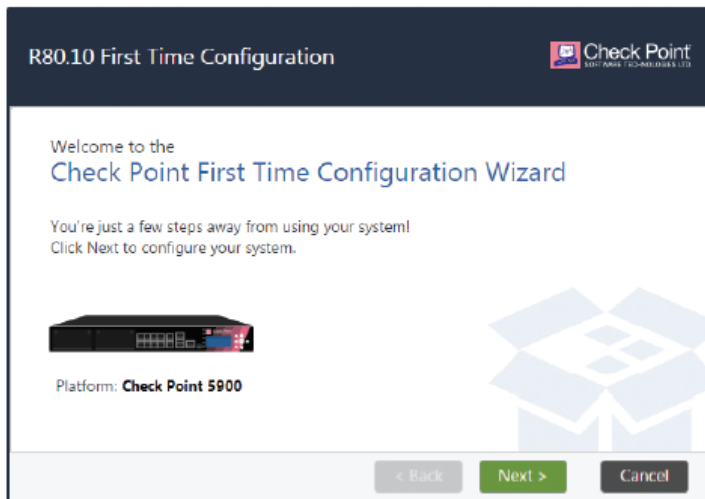


**Figure 3** - First Time Configuration Wizard – Welcome Page


- The wizard will guide you through the connection setup process. Fill in the parameters as required.

# New Check Point Customers - Experience the Check Point Appliance

Install a Gateway and a Management Server on a Single Appliance in Bridge Mode

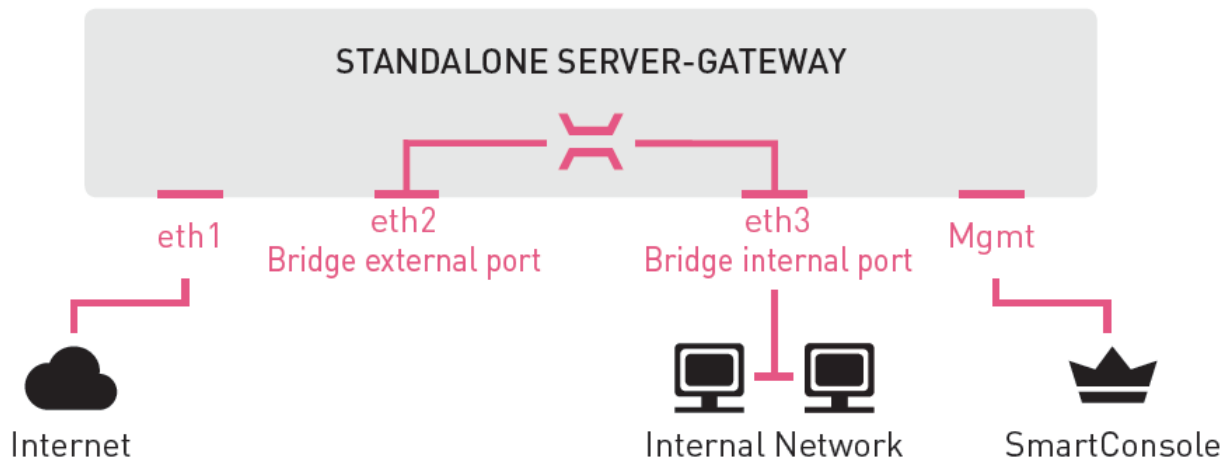

1. After logging in, click **Next**, and select **Quick Standalone setup**. Click **Next**.
2. In the **Networking** section, configure the **IPv4 Address**, a **subnet**, a **Default Gateway**, and the **DNS**.
3. If the appliance requires a Web proxy to connect to the Internet, select **Proxy server**.
4. Connect the network cable to port **eth1** and click **Test Connectivity**.
5. Select **Bridge mode**, click **Next**, and click **Finish** (Fig. 4).

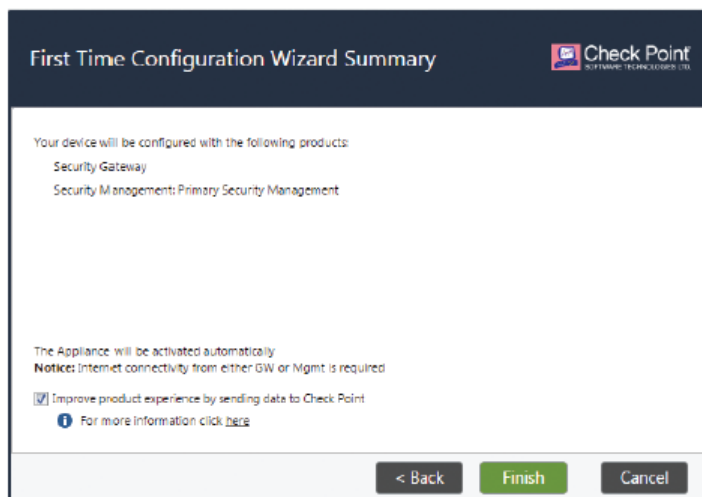

**Figure 4** - First Time Configuration Wizard – Summary Page

6. After the installation has completed, log in again.
7. To get SmartConsole, in the **Overview** page, click **Download Now!**
8. Install SmartConsole on your PC.
9. Open SmartConsole and connect to the IP address of the appliance.
10. Experiment with passing traffic through the bridge interface.

For additional information regarding setting up your appliance, refer to your *Security Appliance Getting Started Guide* <http://supportcontent.checkpoint.com/solutions?id=sk96246>.

## 4. Technical Support

For further information, visit the Support page for your Check Point Security Appliance series <http://supportcenter.checkpoint.com>.

For technical assistance, contact Check Point 24 hours a day:

+1 972-444-6600 (Americas) +972 3-611-5100 (International)