

Dynamic ARP Inspection

<https://t.me/learningnets>




DAVID BOMBAL
EDUCATE.MOTIVATE

Dynamic ARP Inspection

- Want to watch a YouTube video?
 - <https://youtu.be/uKhySSs08tk>



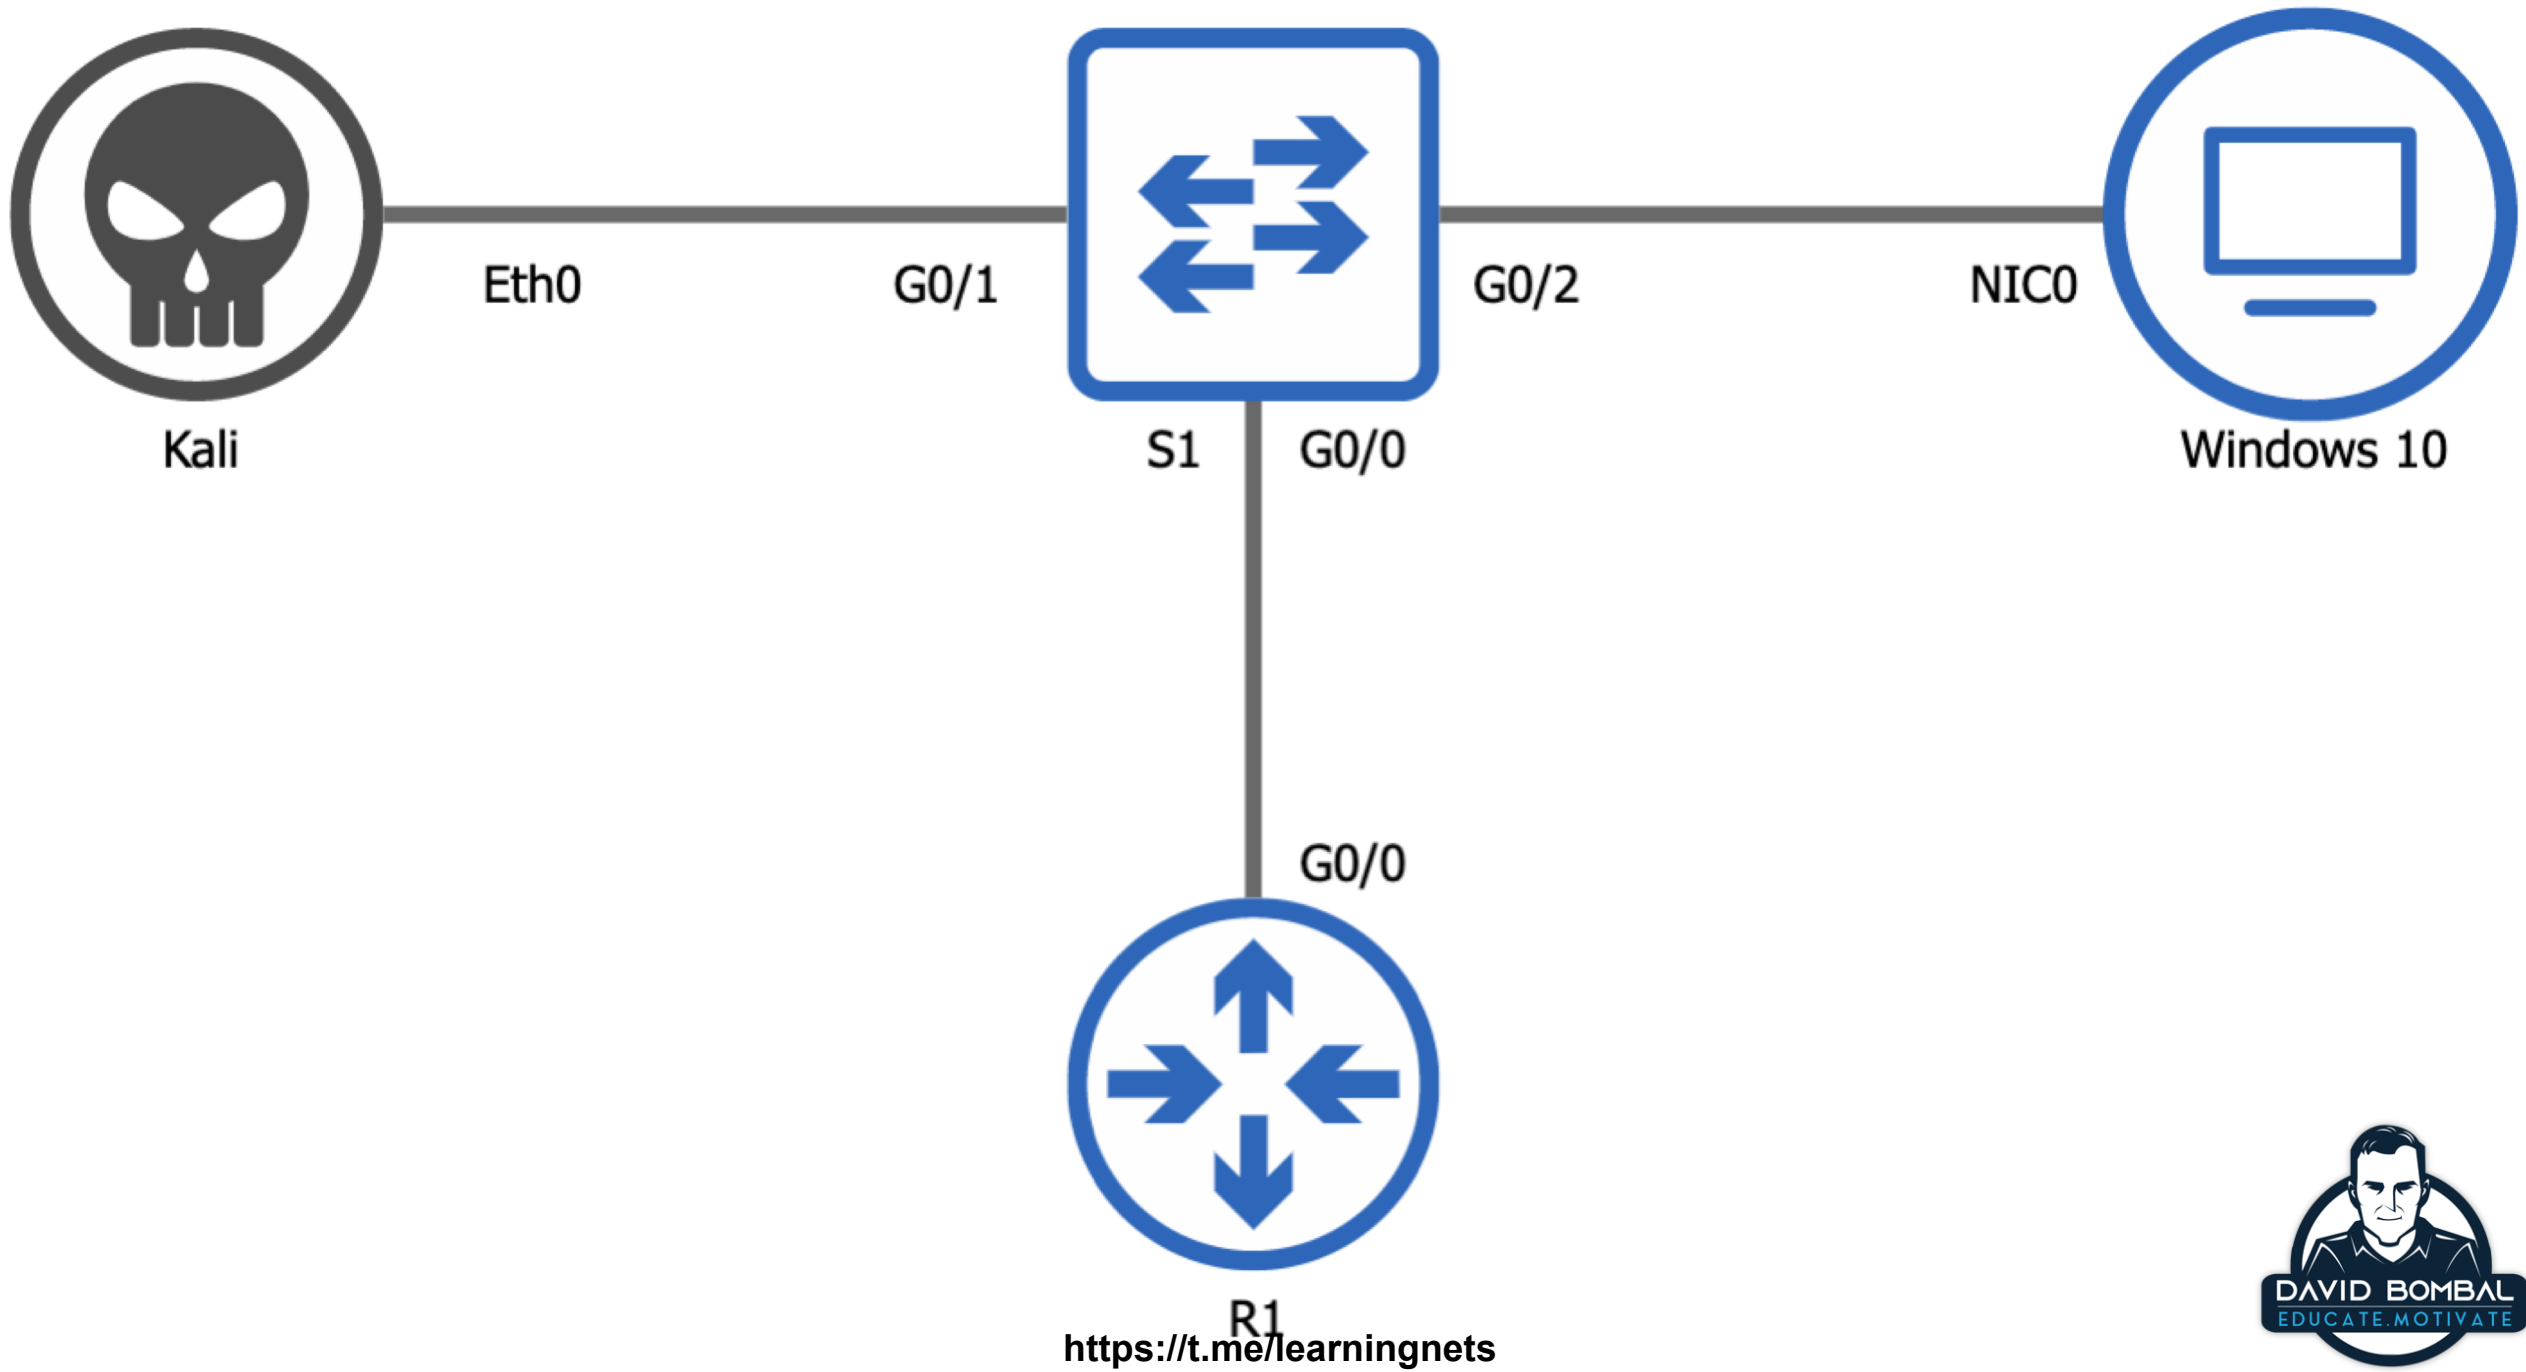

Dynamic ARP Inspection (DAI)

- DAI is a security feature that validates Address Resolution Protocol (ARP) packets in a network.
- DAI allows a network administrator to intercept, log, and discard ARP packets with invalid MAC address to IP address bindings.
- This capability protects the network from certain "man-in-the-middle" attacks.



Requirements

- Either enable DHCP Snooping
- Or, manually configure entries



DAI Configuration

- Configuration examples per network diagram
 - Substitute VLAN 1 with your VLAN
 - Substitute g0/0 and g0/1 with the interfaces you use



DHCP Snooping Part 1:

- Enable DHCP snooping:
 - `conf t`
 - `ip dhcp snooping`
 - `ip dhcp snooping vlan 1`
 - `no ip dhcp snooping information option`
 - `exit`
 - `show ip dhcp snooping`



DHCP Snooping Part 2:

- Specify trusted ports:
 - `conf t`
 - `int G0/0`
 - `ip dhcp snooping trust`



DHCP Snooping Part 3:

- Rate limit untrusted ports (packets per second):
 - `int G0/1`
 - `ip dhcp snooping limit rate 10`
 - `end`



Verification

- Verify that it is working:
 - `show ip dhcp snooping`
 - `debug ip dhcp snooping events`
 - `debug ip dhcp snooping packets`



Another Option:

- If you don't want to use DHCP Snooping, manually configure entries:
 - `conf t`
 - `arp access-list win10pc`
 - `permit ip host 10.1.1.1 mac host 1010.0001.0001`
 - `exit`
 - `ip arp inspection filter win10pc vlan 1`
 - `int G0/2`
 - `no ip arp inspection trust`



Enable and verify DAI:

- Enable DAI:
 - `conf t`
 - `ip arp inspection vlan 1`
 - `ip arp inspection validate src-mac`
 - `int G0/0`
 - `ip arp inspection trust`
 - `end`
 - `show ip arp inspection`



DAI Rate limiting timers:

- Optional: Rate limiting recovery:
 - DAI rate limits by default (Whereas DHCP Snooping does not by default)
 - Default on untrusted ports is 15 packets per second (pps)
 - Trusted ports are not rate limited by default



DAI Rate limiting timers:

- Optional: Rate limiting recovery:
 - G0/0 uses a rate limit of 10 pps and burst of 1 second (default interval) = 10 pps
 - G0/1 uses a rate limit of 10 packets over a burst period of 5 seconds = 10 pps over 5 seconds
- `conf t`
- `int G0/0`
- `ip arp inspection limit rate 10`
- `int g0/1`
- `ip arp inspection limit rate 10 burst interval 5`
- `end`
- `show ip arp inspection interfaces`



Dyamic ARP Inspection

- Go here for more:
 - <http://bit.ly/ciscodai>
 - <http://bit.ly/dynamicarp>
 - <http://www.davidbombal.com>



Dynamic ARP Inspection

<https://t.me/learningnets>



DAVID BOMBAL
EDUCATE.MOTIVATE